



PRODUCT PICTURE




PRODUCT SIZE

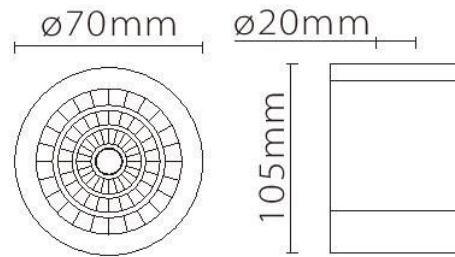

ILLUMINANCE AT A DISTANCE:

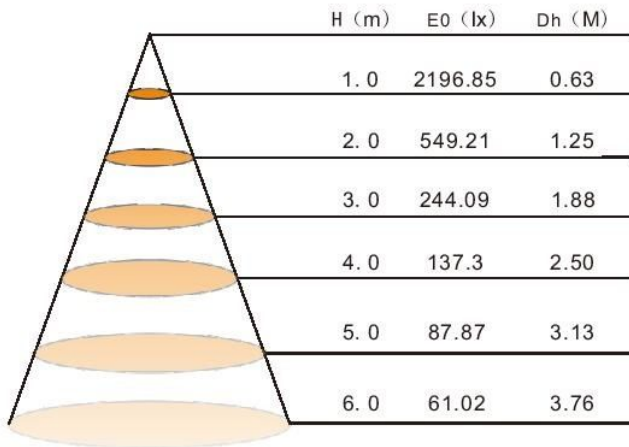


LUMINOUS INTENSITY DISTRIBUTION CURVE

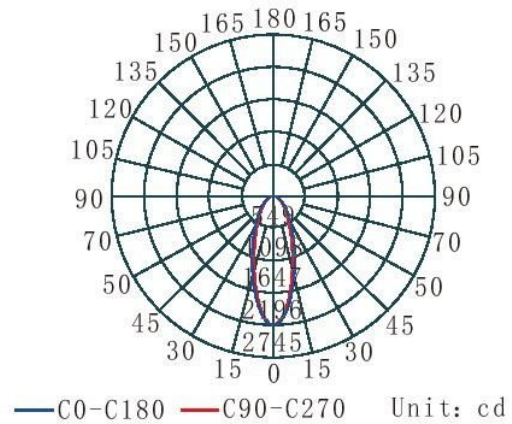

SPECIFICATION

| | | | |
|-------------------|---------------------|---------------------|---------------------|
| Item No. | UL -C3001S-12W | Chips brand | bridgelux |
| Size | ø70×105mm | LED type | COB |
| Output current | 300mA | Beam angle | 15°/24°/38°/60° |
| Input voltage | AC:220-240V 50/60Hz | Driver brand | HC POWER |
| Power factor | ≥0.9 | Working temperature | -20°C to 60°C |
| Power consumption | 12W | Work humidity | 20-80%RH |
| Luminous flux | 960-1080lm | Rated IP | IP20.For indoor use |
| CRI | ≥80 | Average life hours | 20000 hours |

PRODUCT DETAILS:

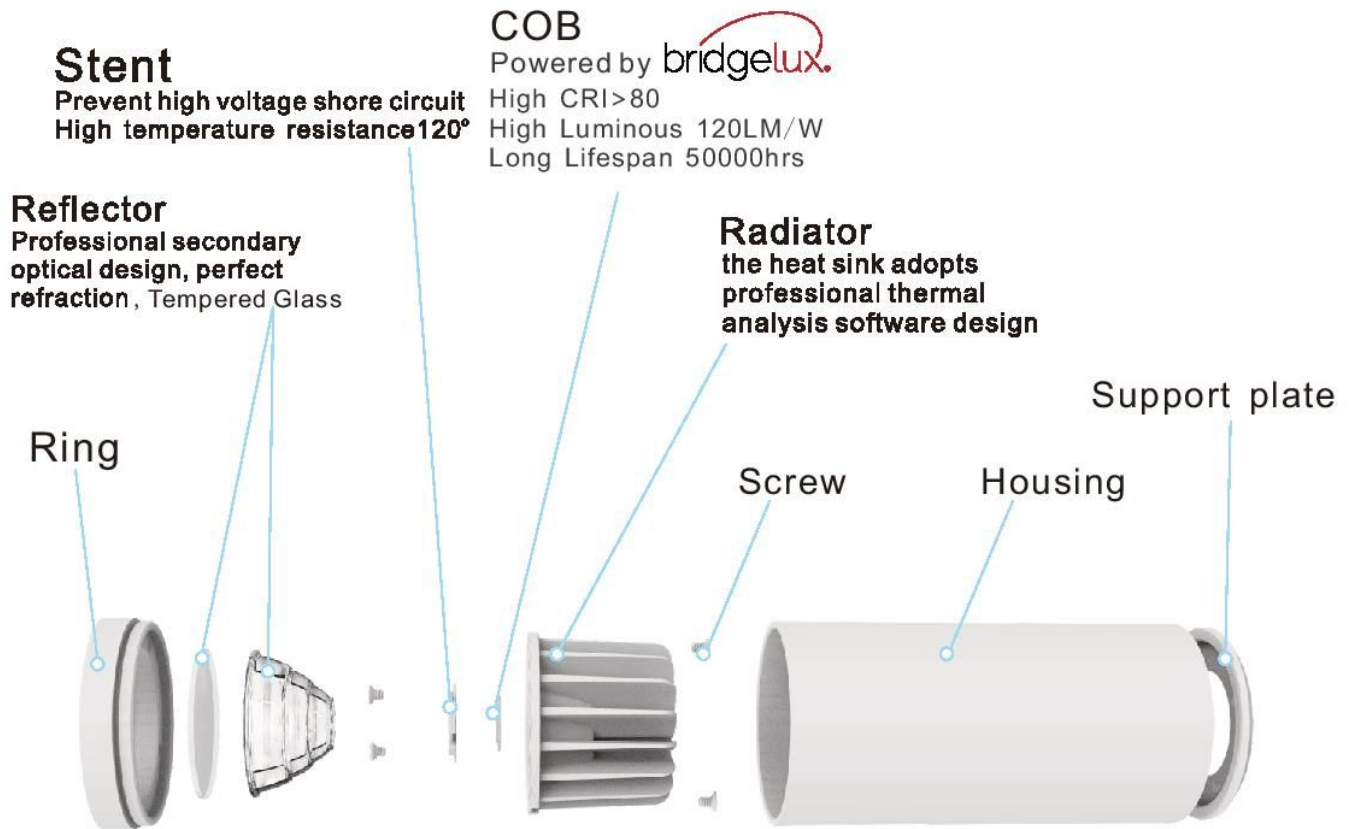

INSTRUCTION

