



Max.8M



Light Sensor




Hold Time  
10s~30min



Mounting Height  
15 m Max.



Cluster-control  
Version



Automatic  
Dimming



5 Years  
Guarantee

## Linear High Bay Light Specification

LED linear mining lamp for warehouse tunnel billboards factory mall lighting, with different configurations, rugged, IP65 level.

**Lumens :**  
>100-130Lm/W

**CCT :**  
3000/4000/5000/6000K

**Certification :**  
CE ROHS SAA UL DLC



# Product Features

---

- Fin Type Interlock heatsink for maximum heat dissipation.
- Lightness in weight and robust.
- Multiple beam angle for options.
- Module based can be used in multiple areas.
- IP65 and easy to install and maintain.

# Applications

---

Widely used in Tunnel Lighting, Municipal Project Lighting, City Landscape Lighting, Outdoor Advertisement Board Lighting, etc.



50W



100W



150W



200W



250W





300W

# Specification

Product code	L2-XTF-50W	L2-XTF-100W	L2-XTF-150W	L2-XTF-200W	L2-XTF-250W	L2-XTF-300W
Power	50W±5%	100W±5%	150W±5%	200W±5%	250W±5%	300W±5%
Luminous flux	≥6000LM	≥12000LM	≥18000LM	≥24000LM	≥30000LM	≥36000LM
LED	3030/3535	3030/3535	3030/3535	3030/3535	3030/3535	3030/3535
Driver	MeanWell/SoSen					
Voltage	AC90-305V					
Luminous Efficacy	100-130LM/WI					
CRI	≥70					
CCT	3000K/4000K/5000K/6000K/7000K					
PF	≥0.9					
Beam Angle	65*100/90/70*145					
Material	AL					
Life Span	≥50000H					
IP Grade	IP65					
Storage Temperature	-40~80°C					
Working Temperature	-20~40°C					
Replaceable	50W	100W	150W	200W	250W	300W
N.W(Kg)	3Kg	4.5Kg	6.1Kg	7.6Kg	9Kg	10.8Kg



# Light Distribution Curve

## L2-XTF-50W

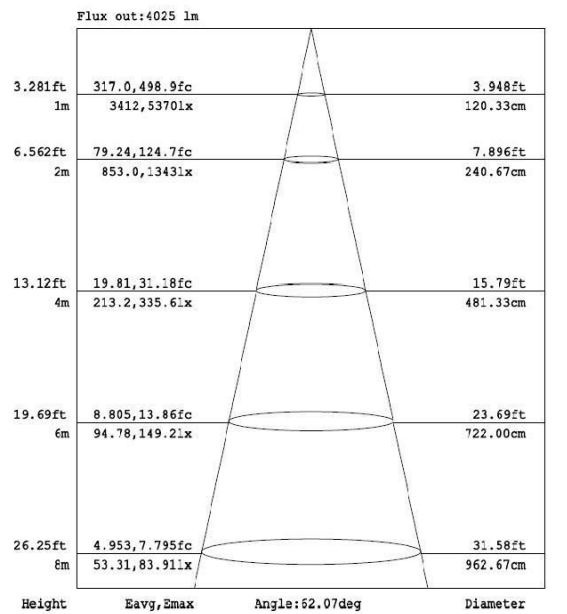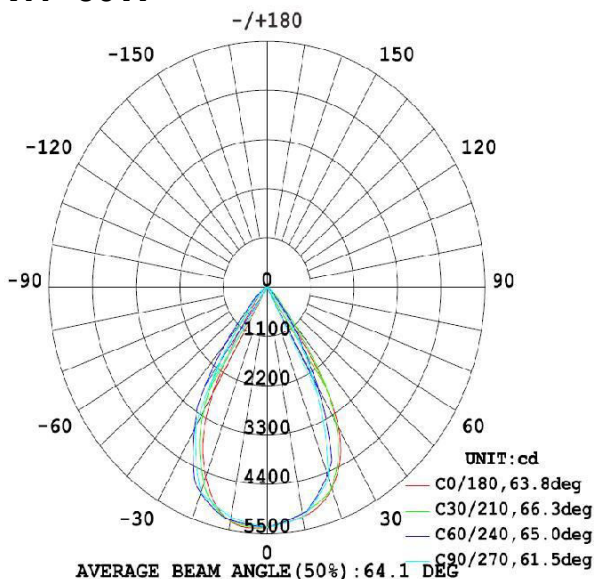

# Light Distribution Curve

## L2-XTF-100W

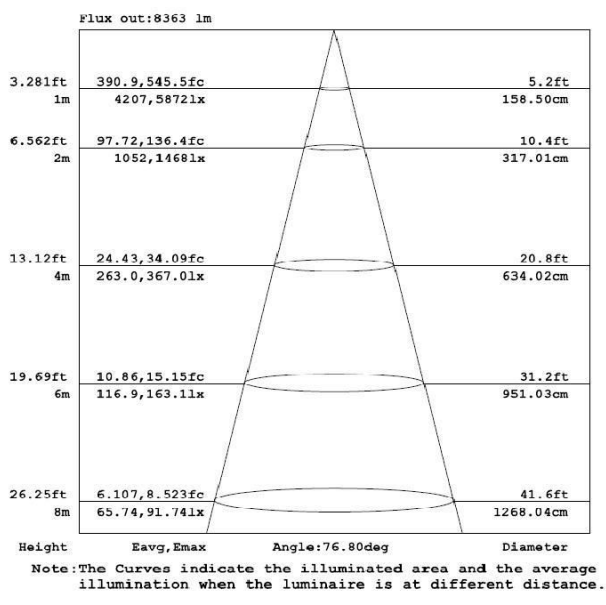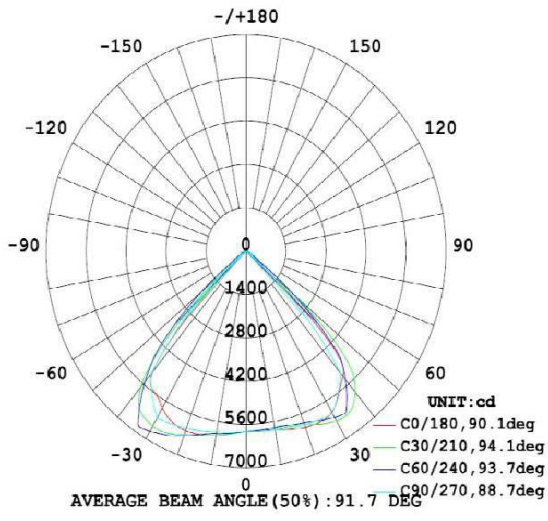

## L2-XTF-150W

