

T5 LED Tube Light

UNILUX
Enlightening Imaginations

160lm/W



RoHS



Product Specification

Luminance Efficacy: Frosted Cover:160lm/W
Clear Cover:170lm/W

LED Type: 2835 LED

Input Voltage: AC100-240V

CCT:3000K 4000K 5000K 6000K

CRI:>80

PF:>0.9

Beam Angle:140°

Driver Type: Internal Driver

Working Temperature: -20°C-48°C


Product Feature

- Pretty and elegant appearance) patented product.
- Directly install on the existing T5 fixture.
- Colorful metal rings available)Blue)Green)Silver) Red and Gold.
- G5 fixed or rotating end cap is available.
- 6063 Aluminum housing)polycarbonate cover) long lifespan.
- ODM/OEM service available) Laser print customer LOGO and customer exclusive lable.
- Mainly used in factory)supermarket)carpark) hospital and school.

UNILUX LIGHTING PAKISTAN

Email: kamran.unilux@gmail.com CELL :0321 2434034


Specification

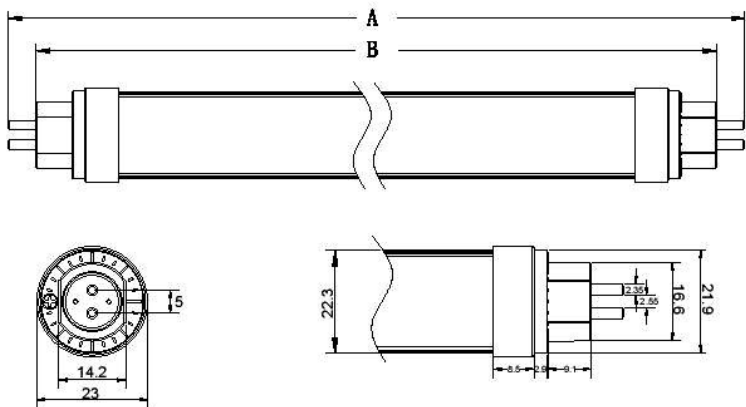

	2feet	3feet	4feet	5feet
	548	848	1148	1448
	Dimension	Dimension	Dimension	Dimension
A:	562mm	862mm	1162mm	1462mm
B:	548mm	848mm	1148mm	1448mm


Beam angle

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

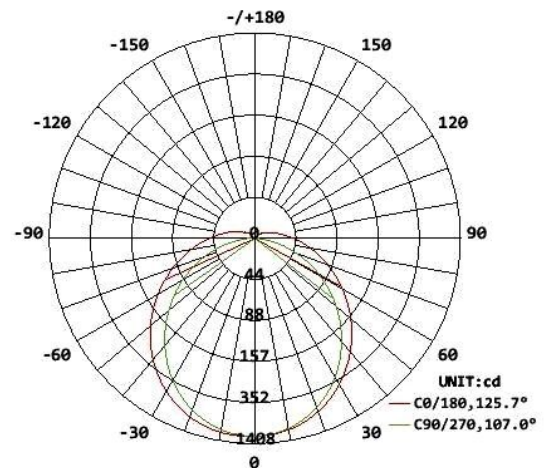

AVERAGE BEAM ANGLE(50%):116.4 DEG
A00-530WT-G5-T

Illumination Distribution Drawing

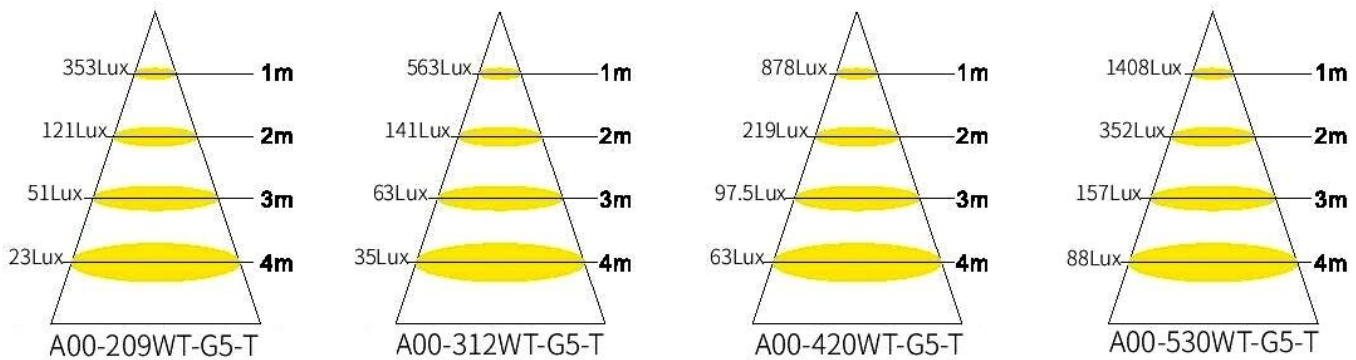

Product Model

Model No.	Length	Power	Lumen(lm)	LED Qty	Size(mm)	Carton Size(cm)	N.W	G.W/25PCS
A00-206WT-G5-T	2ft	6W	960	72pcs	Φ22*L548	L60*W19*H12	5.3kg	5.6kg
A00-209WT-G5-T	2ft	9W	1440	72pcs	Φ22*L548	L60*W19*H12	5.3kg	5.6kg
A00-312WT-G5-T	3ft	12W	1920	96pcs	Φ22*L848	L90*W19*H12	7.1kg	7.4kg
A00-412WT-G5-T	4ft	12W	1920	144pcs	Φ22*L1148	L120*W19*H12	10.3kg	10.6kg
A00-418WT-G5-T	4ft	18W	2880	144pcs	Φ22*L1148	L120*W19*H12	10.3kg	10.6kg
A00-420WT-G5-T	4ft	20W	3200	144pcs	Φ22*L1148	L120*W19*H12	10.3kg	10.6kg
A00-425WT-G5-T	4ft	25W	4000	168pcs	Φ22*L1148	L120*W19*H12	10.3kg	10.6kg
A00-520WT-G5-T	5ft	20W	3200	192pcs	Φ22*L1448	L150*W19*H12	11.7kg	12.0kg
A00-525WT-G5-T	5ft	25W	4000	192pcs	Φ22*L1448	L150*W19*H12	11.9kg	12.2kg
A00-530WT-G5-T	5ft	30W	4800	216pcs	Φ22*L1448	L150*W19*H12	12.6kg	12.9kg
A00-535WT-G5-T	5ft	35W	5400	216pcs	Φ22*L1448	L150*W19*H12	12.6kg	12.9kg