

SURFACE MOUNTING DOWN LIGHT SERIES



IP44



Model Number: UL-2201

The reflector ensures maximum optical output ratio of visual comfort. Suitable for family and business premises mild waterproof Ip44

1. Luminaires in the product line cover a wide range of lumen categories, so provide a suitable solution for a large number of lighting tasks.
2. lighting design based on surface mounted lower lights does not need to solve the problem. Compact combination of bright light and outdoor luminaire firmness, wide beam distribution allows it to be used in passages, arcades and private residential terraces. Compact type can be easily washed through walls to use vertical lighting.

DESCRIPTION

Power: 15w- 20W – 30W

Lumens: 1275lm/ 1700lm/ 2550lm

Color Temp: 3000k- 4000k

Size: 128xH100mm/ 160xH115mm/ 195xH130mm


Driver: LUFID PF:>0.9

CRI > 80


IP Rating : IP44 ,



LUMINAIRE ARRANGEMENT

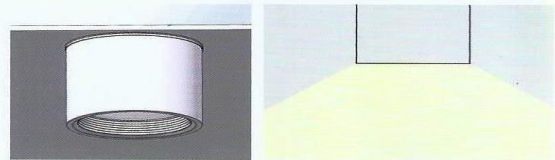

Floodlight beam wide, rotating symmetrical light distribution for general lighting

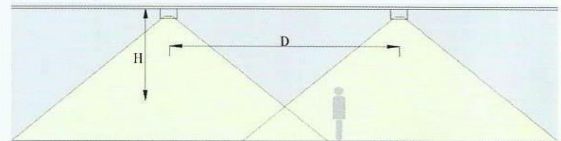


For luminaire arranged in a straight line, the spacing between the two skimmers (D) may be 1.5 times the brightness above the working plane ($D = 1.5 \times H$)



Ambient light generated by wide beam distribution.

STRUCTURE AND FEATURES



UNILUX LIGHTING PAKISTAN

Email: kamran.unilux@gmail.com CELL :0321 2434034