


IEC IP CE IK09
60598 66

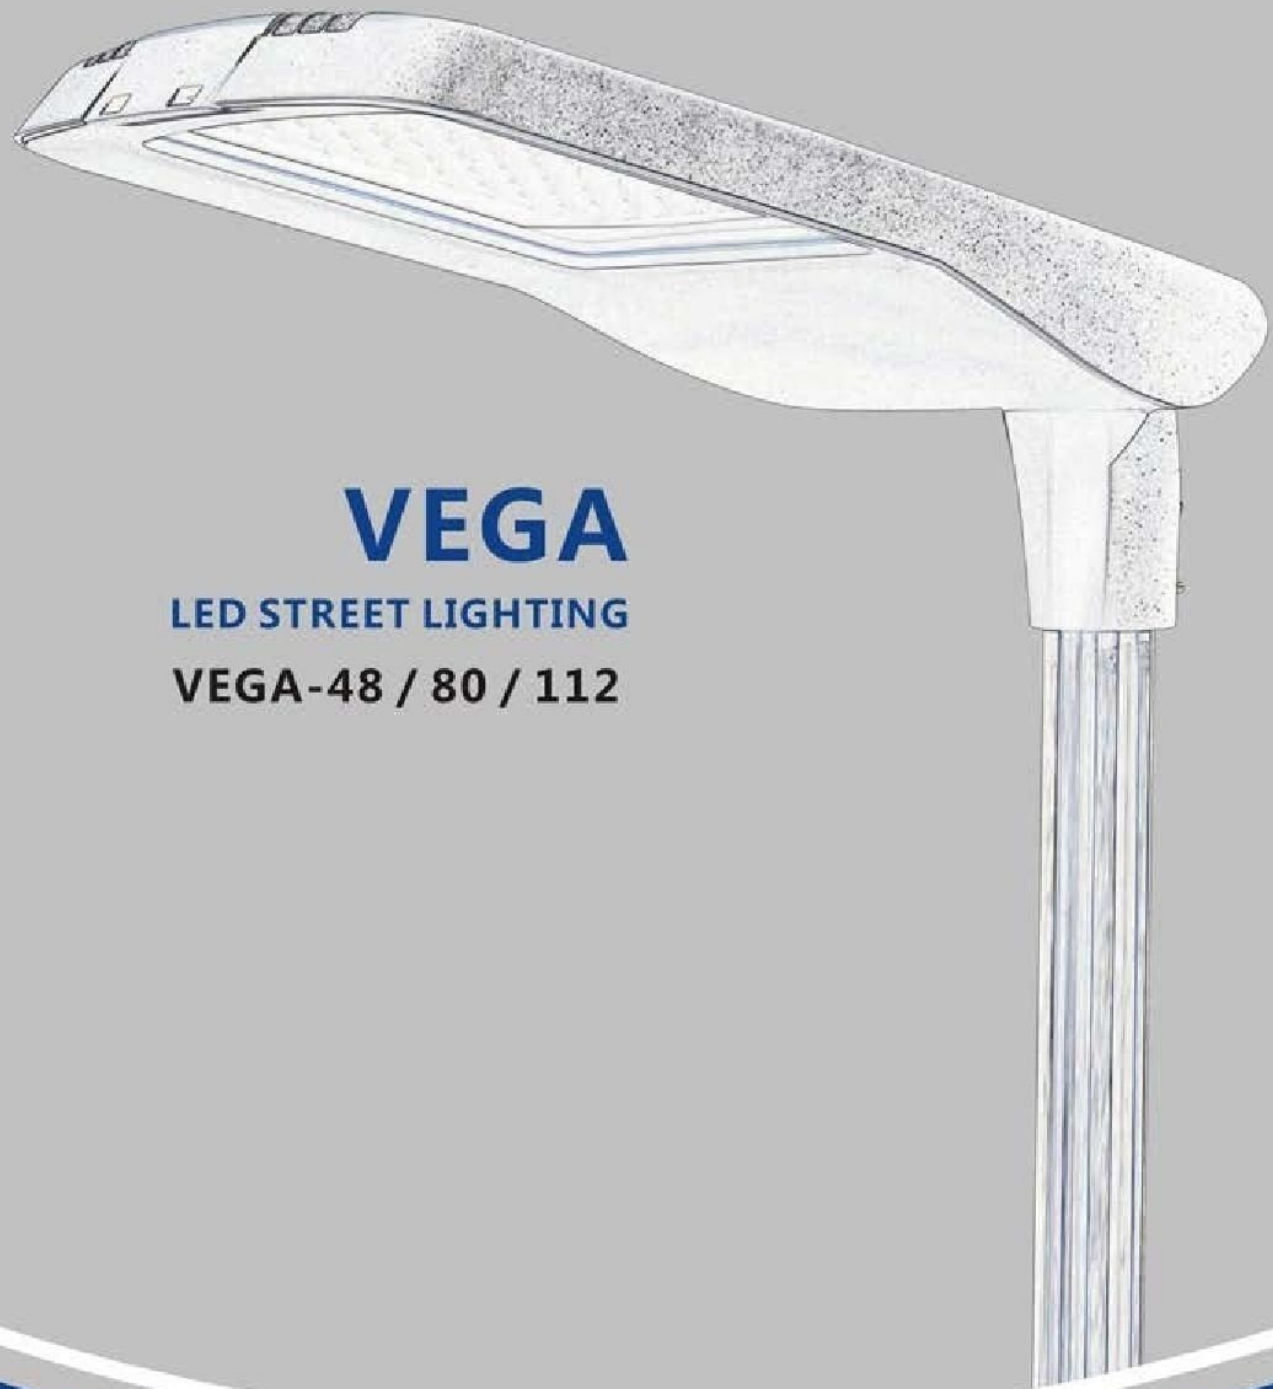

VEGA

LED STREET LIGHTING

VEGA-48 / 80 / 112

UNI-LUX LIGHTING PAKISTAN

Email: kamran.unilux@gmail.com

Cell No. 0092 321 2434034



Vega-48 / Vega-112 LED STREET LIGHTING

Technology Data :

Product Name	LEDs	Wattage	CCT	V/HZ	Carton size (mm)
Vega-48	16	20W	2200K -6500K	90-305V/ 50-60HZ	600x300x150
		40W			
	32	60W			
		80W			
	48	100W			
		120W			
Vega-112	80	150W	2200K -6500K	90-305V/ 50-60HZ	905x415x185
	96	180W			
		200W			
	112	220W			
		250W			
		300W			

Body :	Die-Cast Aluminum .
Optical system :	LED mould light distribution lens , diffuser with super white tempered glass .
Electric:	Quick on/off connector when be open.
Finishing:	Surface anti-ageing electrostatic spray processing. Super resistance to corrosion
Installation height:	4M --8M (Vega-48) / 8M --12M (Vega-112)
Lifetime (Hrs):	> 50000 hrs
Ambient Environment :	-40°Cto+55°C
Installation pipe:	Φ48/ Φ60/ Φ76
Power Factor:	>0.95
Class:	I/II

UNI-LUX LIGHTING PAKISTAN


Email: kamran.unilux@gmail.com

Cell No. 0092 321 2434034




Vega-48 / Vega-112
LED STREET LIGHTING

Dimension Size: Vega-48

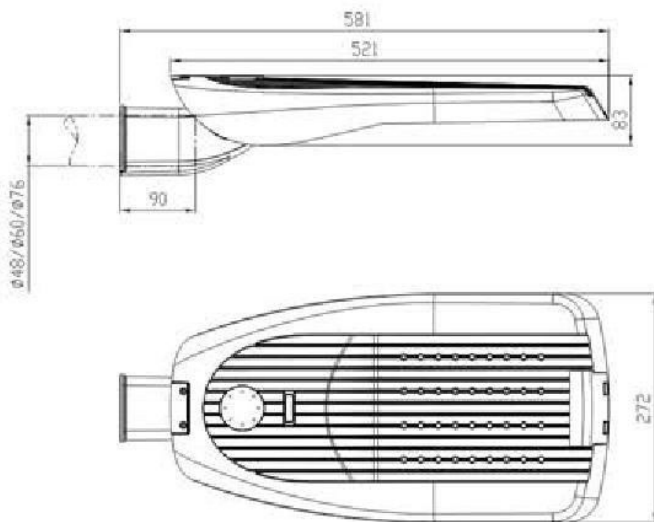

Dimension Size: Vega-112

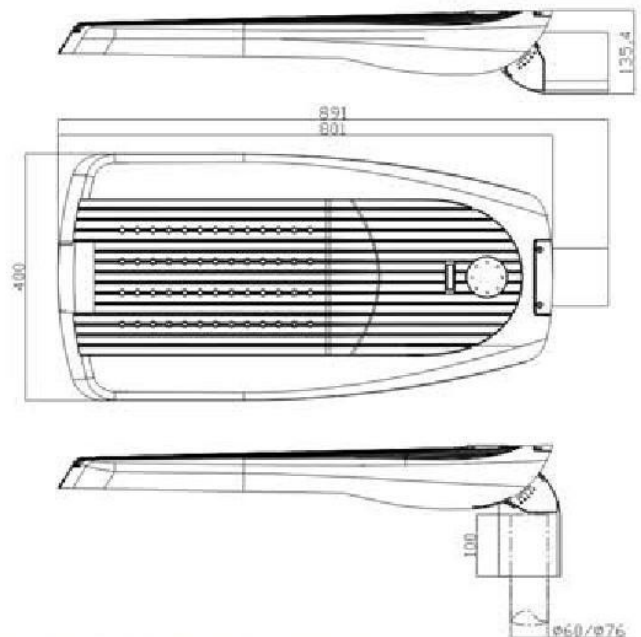

UNI-LUX LIGHTING PAKISTAN

Email: kamran.unilux@gmail.com

Cell No. 0092 321 2434034



Vega-80 LED STREET LIGHTING

Technology Data :

Product Name	LEDs	Wattage	CCT	V/HZ	Carton size (mm)
Vega-80	48	100W	2200K -6500K	90-305V/ 50-60HZ	760x355x160
		120W			
	64	120W			
		150W			
80	200W				

Body :	Die-Cast Aluminum .
Optical system :	LED mould light distribution lens , diffuser with super white tempered glass .
Electric:	Quick on/off connector when be open.
Finishing:	Surface anti-ageing electrostatic spray processing. Super resistance to corrosion
Installation height:	6M --10M
Lifetime (Hrs):	> 50000 hrs
Ambient Environment :	-40°Cto+55°C
Installation pipe:	Φ48/ Φ60/ Φ76
Power Factor:	>0.95
Class:	I/II

UNI-LUX LIGHTING PAKISTAN

Email: kamran.unilux@gmail.com


Cell No. 0092 321 2434034

Vega-80


LED STREET LIGHTING



Dimension Size:

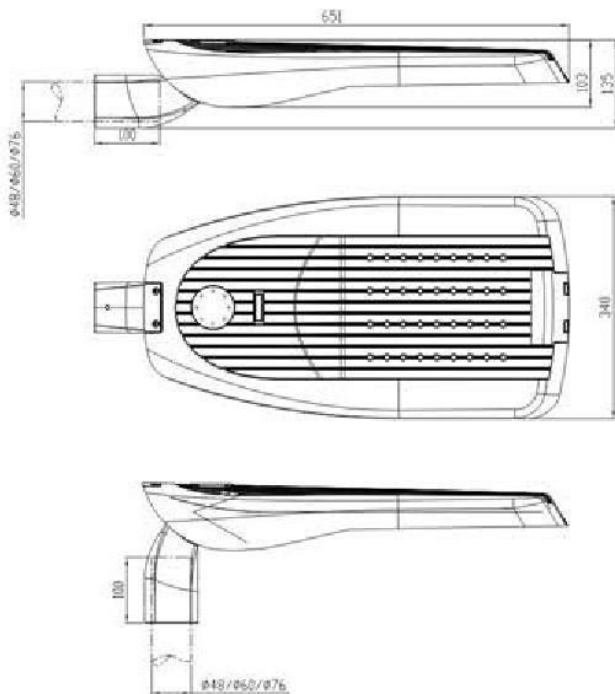

Adjust Degree: Top / side $\pm 15^\circ$

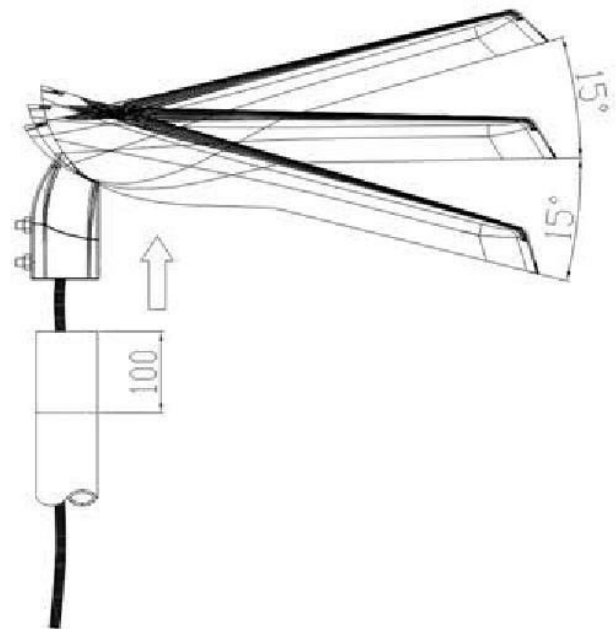

UNI-LUX LIGHTING PAKISTAN





Email: kamran.unilux@gmail.com

Cell No. 0092 321 2434034

Vega-48 / 80 / 112

LED STREET LIGHTING

MODEL	LEDS	Power consumpt	Nominal Initial Flux(lm)		
			WW	NW	CW
Vega-80	32pcs	75W	7500	7600	7700
Vega-80	48pcs	90W	9450	9600	9750
Vega-80	48pcs	100W	10000	10200	10400
Vega-80	64cs	120W	12100	12300	12500
Vega-80	64pcs	130W	13000	13200	13400
Vega-80	80pcs	150W	15750	16000	16250
Vega-80	80pcs	180W	18000	18250	18500

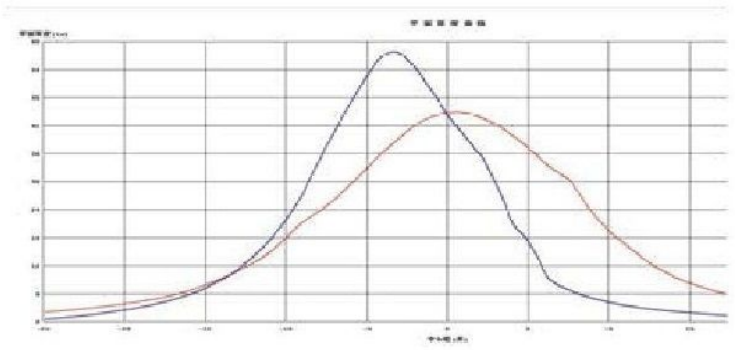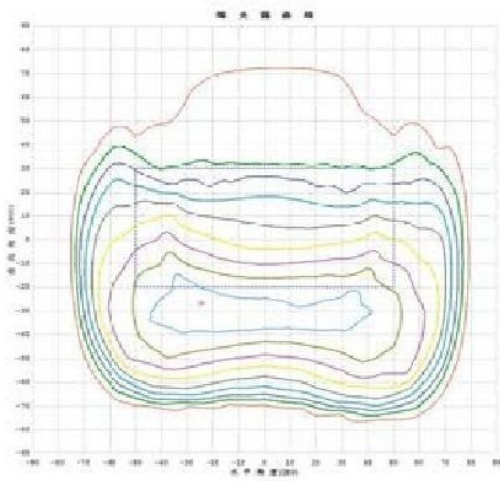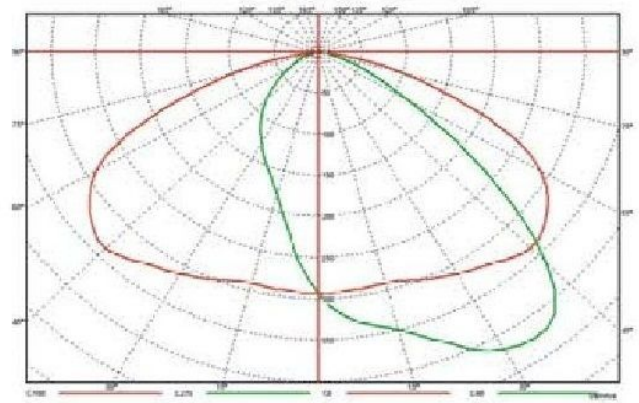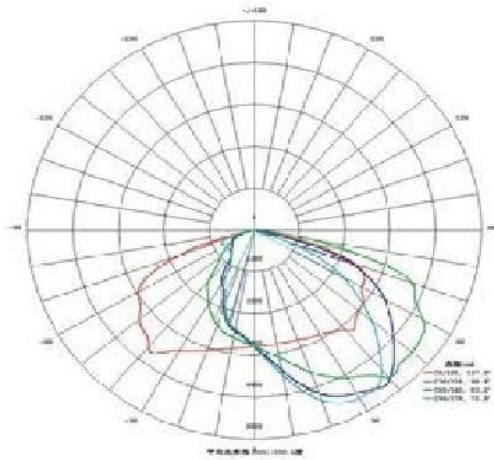



UNI-LUX LIGHTING PAKISTAN

Email: kamran.unilux@gmail.com

Cell No. 0092 321 2434034

Vega-48 / 80 / 112

LED STREET LIGHTING

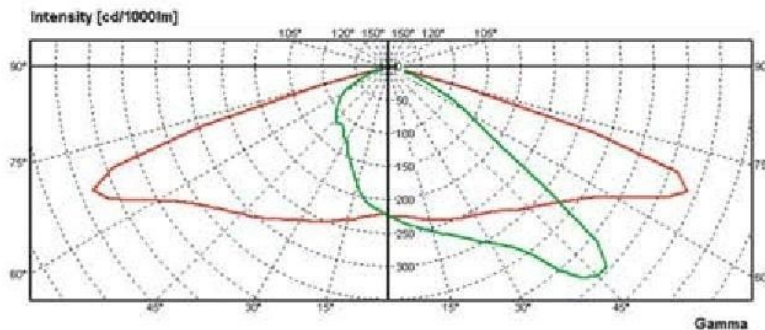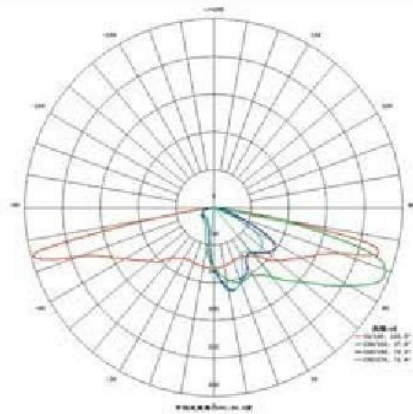

MODEL	LEDS	Power consumpt	Nominal Initial Flux(lm)		
			WW	NW	CW
Vega-112	80pcs	150W	16500	16750	17000
Vega-112	80pcs	180W	18900	19200	19500
Vega-112	96pcs	200W	21000	21300	21600
Vega-112	112cs	250W	26250	26500	26750
Vega-112	112pcs	280W	29400	29700	30000
Vega-112	112pcs	300W	30000	30400	30600

Typical HID Replaced	Product	Lumens	Luminaire Power	Luminaire Efficacy	Energy Savings
150W MH	Vega-48	10000lm	82W	110lm/W	45%
250W MH	Vega-80	18000lm	154W	115lm/W	40%
400W MH	Vega-112	28000lm	245W	115lm/W	40%

UNI-LUX LIGHTING PAKISTAN

Email: kamran.unilux@gmail.com

Cell No. 0092 321 2434034